



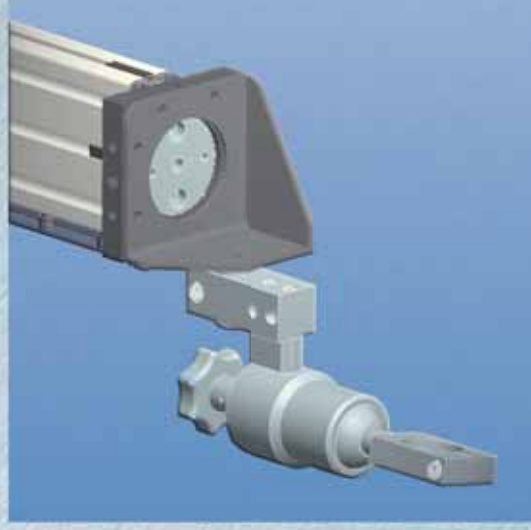

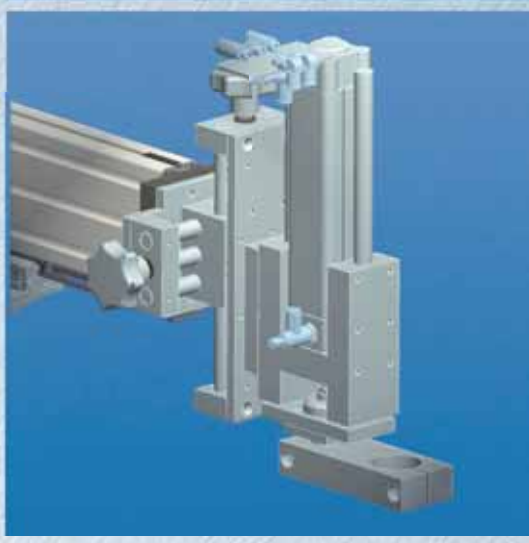

Tripod units FSB 720/420, FSB 720/720


Manual column and boom

Standard equipment
Modular system
Easy assembly, high stabillity
Linear-guides
Self-locking trapezoid-threaded spindle (vertical axis)
Fixing of the horizontal axis via clamping lever

Recommended areas of use
Manual torch adjusting/positioning via handwheel (vertical axis) and handle (horizontal axis)

Accessories
Swivel unit
Plug 30/L45
Torch holder for machine torch inside-ø30 / 44,2 mm
Ball joint and torch holder
Support FGU 4
Mounting set
Pneumatic torch movement
Slewing ring
Pneumatic torch motion

Fronius
PERFECT WELDING

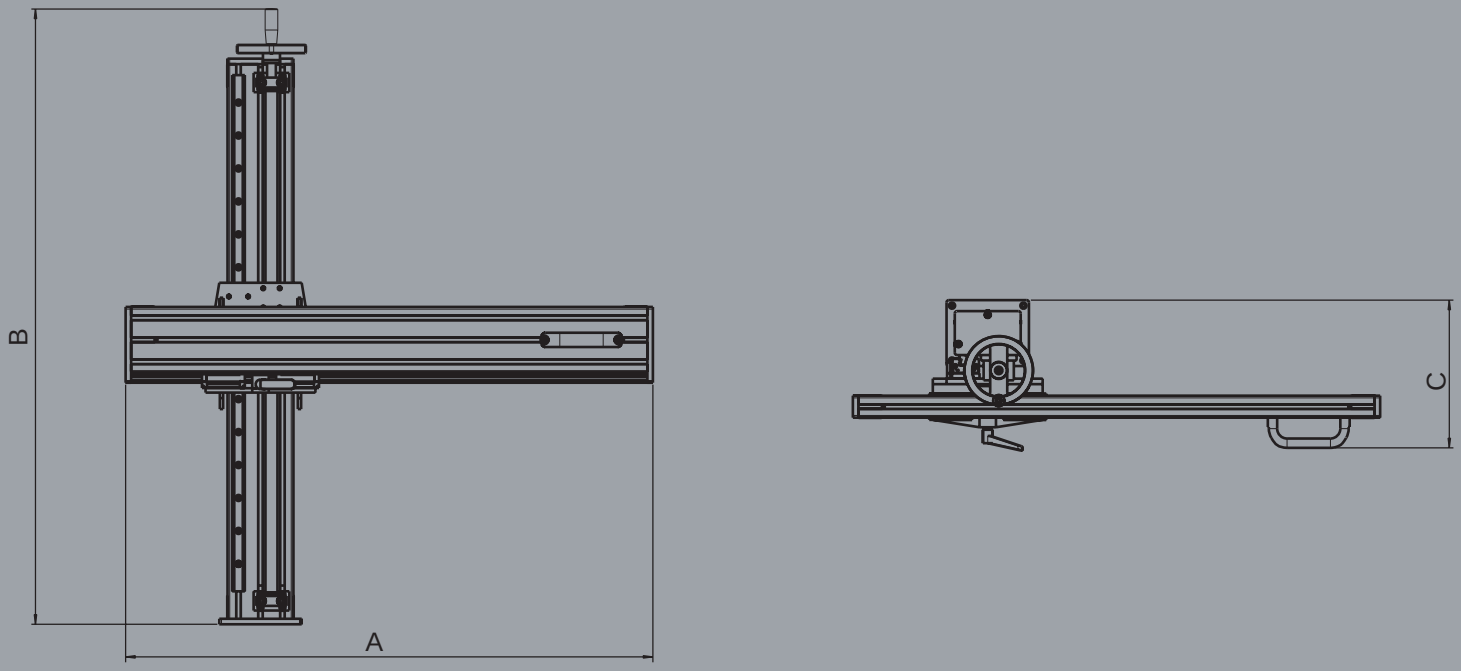

Technical data	FSB 720-420	FSB 720-720
Max. load capacity	40 kg	40 kg
Net weight	20 kg	40 kg
Dimensions		
• A	660 mm	1120 mm
• B	1120 mm	960 mm
• C	269 mm	269 mm
vertical travel	720 mm	720 mm
horizontal travel	420 mm	720 mm
diameter column	120 mm	120 mm
diameter boom	118 mm	118 mm

Text and illustrations technically correct at time of going print. We reserve the right to make modifications.
This document may not be copied or otherwise reproduced, wether in part or in its entirety, without the express prior written consent of Fronius International GmbH.

PERFECT WELDING

FRONIUS INTERNATIONAL GMBH
Buxbaumstraße 2, P.O.Box 264, A 4602 Wels
Tel: +43/7242/241-0, Fax: +43/7242/241-3940
E-Mail: sales@fronius.com

www.fronius.com